


SDL

Stage Dolly

Assembly Instructions

Tools Required

Crescent (adjustable) Wrench 

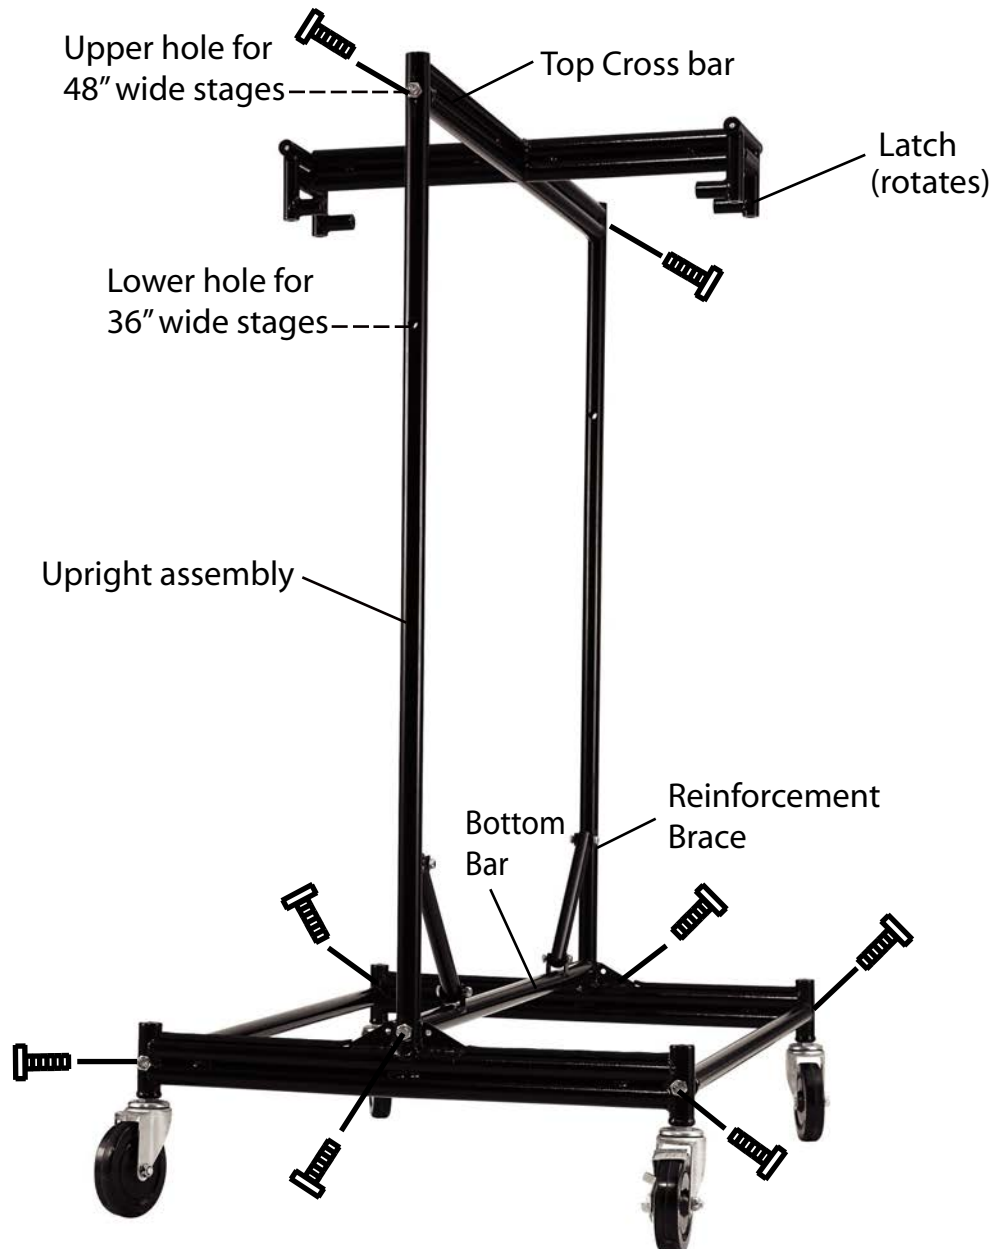

Loading Stages:

- 1) For 48" wide stages, screw the top cross bar in the upper holes. For 36" wide stages screw the top cross bar into the lower holes.
- 2) Once dolly is assembled, rotate latch and load stages. Release latch into original position to prevent stages from falling off the dolly.

**National Public
SEATING Corp.**

149 ENTIN ROAD, CLIFTON, NJ 07014
TEL 973-594-1100 | FAX 973-594-1500
e-mail: info@NationalPublicSeating.com