



### SPECS:

- Constructed with 3/4" solid plywood core
- Available with carpet in choice of 4 colors or 1/8" thick tempered hardboard
- 16-gauge, 1-13/16" high formed steel channel frame reinforced with 16-gauge steel angle welded to the inside of the channel
- 14-gauge steel tubing capped at the point of floor contact with high impact plastic glides
- Legs open and close using only one hand

- Stages and risers equipped with drop-in couplings that allow units of same or different heights to be joined together
- All ganging devices are permanently secured to each unit
- Exceeds 200 lbs. per square foot load bearing capacity
- Available in 36" and 48" widths and 96" length
- Comes in 4 heights; 8", 16", 24" and 32"
- Skirting available for all stages in 2 styles; shirred pleat and box pleat
- Optional Stage Pies for semi-circle arrangements
- 3 step heights available to connect to 16"H Stages and above
- Optional Guardrails recommended for safety. Guardrails are 14-gauge
- 10-year warranty




MODEL S4824C SHOWN

MODEL SPST48C SHOWN


SURFACE CAN BE HARDBOARD OR CARPETED

**INCLUDES 36"W AND 48"W STAGES, STAGE PIES, & STAGE SETS**


### CARPET COLOR OPTIONS

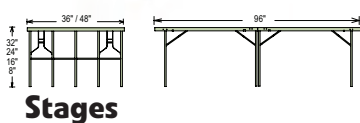

**Stages**

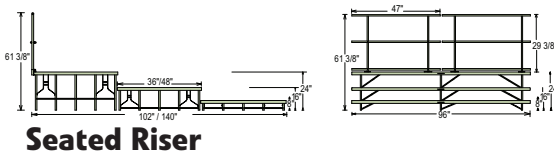

**Seated Riser**

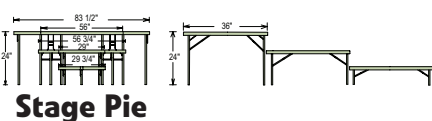

**Stage Pie**

### Box Pleat Skirting



### Shirred Pleat Skirting



### SKIRTING COLOR OPTIONS



### USE WITH:

**Model #GRS**  
Stage Guard Rail



**Model #SDL**  
Stage Dolly

BUILT IN LATCH SECURES STAGES TO DOLLY  
HOLDS 6 STAGES



**Steps**  
For Stages



# National Public Seating

