



149 Entin Road
Clifton, New Jersey 07014
973.594.1100
973.594.1500 - Fax

CLIFTON NJ 07014
ONTARIO CA 91764
MEMPHIS TN 38106


TA85R/L TABLET ARM ASSEMBLY

Parts included:

- 1 Tablet
- 1 Tablet arm
- 1 Clip
- 4 Brackets
- 8 Phillip head screws

Tools needed:

- Phillips head screw driver

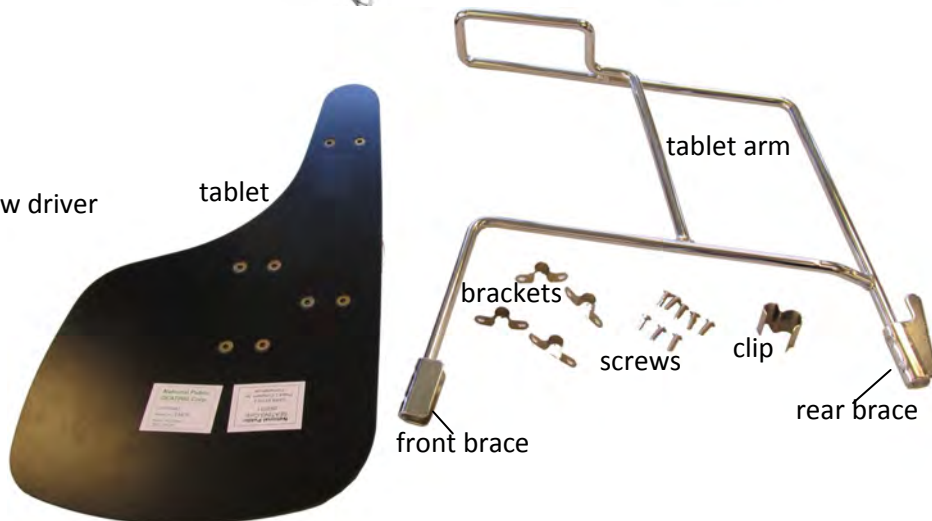

Assembly:




1. Align tablet arm with pre-drilled holes on underside of tablet.
2. Place brackets on tablet arm and secure to tablet with screws. (Do not over-tighten.) For "flip top" tablet, do not install brackets in center of tablet. (Fig. 1)

Installation of tablet arm onto 8500 series chair: (Visit www.nationalpublicseating.com for a video demonstration.)

1. Align rear brace of tablet arm with rear leg of chair as shown in picture. (Fig. 2, Fig. 3)
2. Position front brace of tablet arm over front leg of chair. (Fig. 2, Fig. 4)
3. Push firmly down on tablet arm to lock into position.
4. Secure narrow part of clip to the portion of the tablet arm that is parallel to seat frame, then secure wider portion of the clip to the seat frame. (Fig. 5)

CAUTION:

Ensure that all screws are properly installed before using unit. Check all screws periodically. Failure to completely tighten the screws may result in tipping and possible injury.

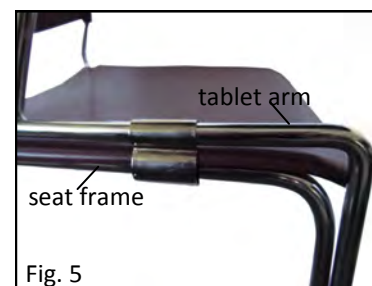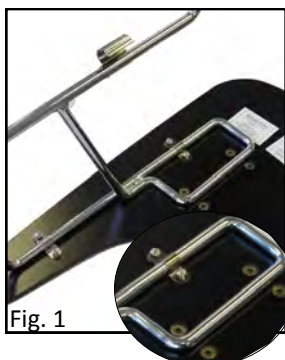

Dear customer,

Thank you for your purchase. Although great care goes into the manufacturing and packaging of this product, mistakes are possible. If you encounter any missing parts or have difficulty with assembly, please call our customer service Toll Free at **1-800-261-4122** for immediate and courteous service.

www.nationalpublicseating.com