

Revised: October 11, 2010

Models include:

- ▶ 59T0829120ELS12
- ▶ 59T0827120ELS12
- ▶ 59T0829120ELS10*WC

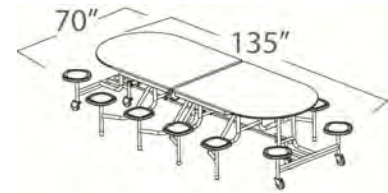


TABLE SHOWN 59T0829120ELS12

MATERIALS

a. Tabletop

The tabletop shall be constructed of $\frac{3}{4}$ " thick, particleboard with average density of 45 P.C.F. Tabletop and bench corners shall have a $\frac{1}{2}$ " radius. Tabletop and bench is laminated with Wilsonart® .030 high-pressure laminate sheet for superior abrasion resistance. Choices of laminate shall be standard Wilsonart® color choices. Laminates shall meet or exceed NEMA standards. A .028" phenolic backer is bonded to the bottom of the table core for stability / moisture resistance. Total table and bench top thickness shall be .808" +/- .004".

Edges are sealed and finished with black EdgeGuard™. EdgeGuard™ is a sprayed on polyurea edge treatment that provides superior resistance to moisture, eliminates unsanitary food traps, and is extremely tamper resistant. Additional colors are available: desert sand, slate, tan, country blue, light gray, and red brick.

Top is secured to frame with #10 x $\frac{3}{4}$ " screws, 9" on centers.

b. Frame

Self-supporting, MIG welded, unitized frame design uses 14-gauge 1", 1 $\frac{1}{4}$ " and 1 $\frac{1}{2}$ " steel tubing. Lock plates are 8-gauge steel, laser cut to exact tolerances. Low profile 2" high, 14-gauge "C"-shaped aprons provide maximum top clearance. Grade 5 hex machine bolts with aircraft type lock nuts are used at assembly points and shoulder bolts are used at stretcher bar to leg connections.

All metal parts are thoroughly cleaned to resist corrosion and provide maximum paint adhesion, finished with high-grade electrostatically applied baked-on epoxy powder coat for superior resistance to abrasion, marring and scratching. The metal finish shall be baked on lightly textured polyester powder coating with chrome plating available on caster legs.

c. Table Undercarriage

All critical parts at the pivot points are attached to the unitized steel frame. Steel latches are automatic in both the storage and in-use positions and are located in such a way that they cannot be accidentally opened or knocked out of adjustment.

Torsion bars and Torsion springs assist in closing and opening tables.

Table rolls on six 4" x 1 $\frac{1}{4}$ " wide Poly II gray rubber, non-marking, ball-bearing swivel casters. Poly II rubber wheels provide excellent floor protection, abrasion resistance, good impact strength, quiet operation, and rolling ease. They are non-marking and resistant to water, oil and most acids and chemicals.

d. Stools

Stool seats are molded from high-impact polypropylene and are a 13" quadroundular shape.

Stools are mounted directly on a 6" square 8-gauge steel plate. This plate is welded to a 1¼" diameter, 14-gauge vertical tube. Seat columns contact floor directly with rubber cushioned with a molded in-steel washer, non-skid, non-marring end cap.

STORAGE FOOTPRINT

Two tables in the stored position should occupy an area of 80" wide x 83" long; three tables 44" wide x 83" long. Each additional table adds 34" to the stacked length.

CERTIFICATIONS AND PERFORMANCE STANDARDS

GREENGUARD® Certification We have been awarded both the GREENGUARD Indoor Air Quality Certification® and the more stringent Children & Schools Certification (daycare and K-12) by the GREENGUARD Environmental Institute (GEI). All GREENGUARD® products have been tested for their chemical emissions performance and can be found in the GREENGUARD® product guide at greenguard.org.

UL Listed Tested by Underwriters Laboratories; meets the more stringent safety standards contained in UL Standard for Safety for Folding Rollaway Tables, UL 2040.

WARRANTY

As part of Palmer Hamilton's on-going commitment to quality, product specifications, changes or modifications may be made without prior notice. Palmer Hamilton warrants that its products shall be free from defects in original material and workmanship for a period of fifteen years from the original shipment date. This warranty shall not apply to normal wear and tear or in the event products are damaged as a result of misuse, abuse, vandalism, neglect, accident, improper application, and modification or repair by persons not authorized by Palmer Hamilton. The company will, at its discretion, repair or replace any defects. Any repair or replacement must be approved in advance by the factory before any action is taken. There are no implied warranties of fitness or merchantability, and there are no other express warranties beyond the warranties expressed here.



800-788-1028

For a complete listing of all our products
visit our website at palmerhamilton.com



Children & Schools
made in the
USA

