

2

1

REV	DESCRIPTION	DATE	INT
A	UPDATE TEXT	2/2/14	INT


**SPECSHEET**

**PVB 4500**

Featherlite Collegiate Net System  
For 3" Sleeves, Height Adjustable  
Aluminum Volleyball Upright

THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC  
AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

FAX: 860.444.1779 (SALES)  
860.440.0928 (ENG.)




www.jaypro.com

800.243.0533 (TOLL FREE)  
860.447.3001 (LOCAL)

JAYPRO SPORTS, LLC, 976 HARTFORD TURNPIKE, WATERFORD, CT 06386 USA

DRAWING NAME/PART NUMBER:	
<b>PVB 4500</b>	
DRAWN BY:	ISSUE DATE:
DRL	2/2/2011
CHECKED BY:	
SHEET:	REV:
1 OF 2	A

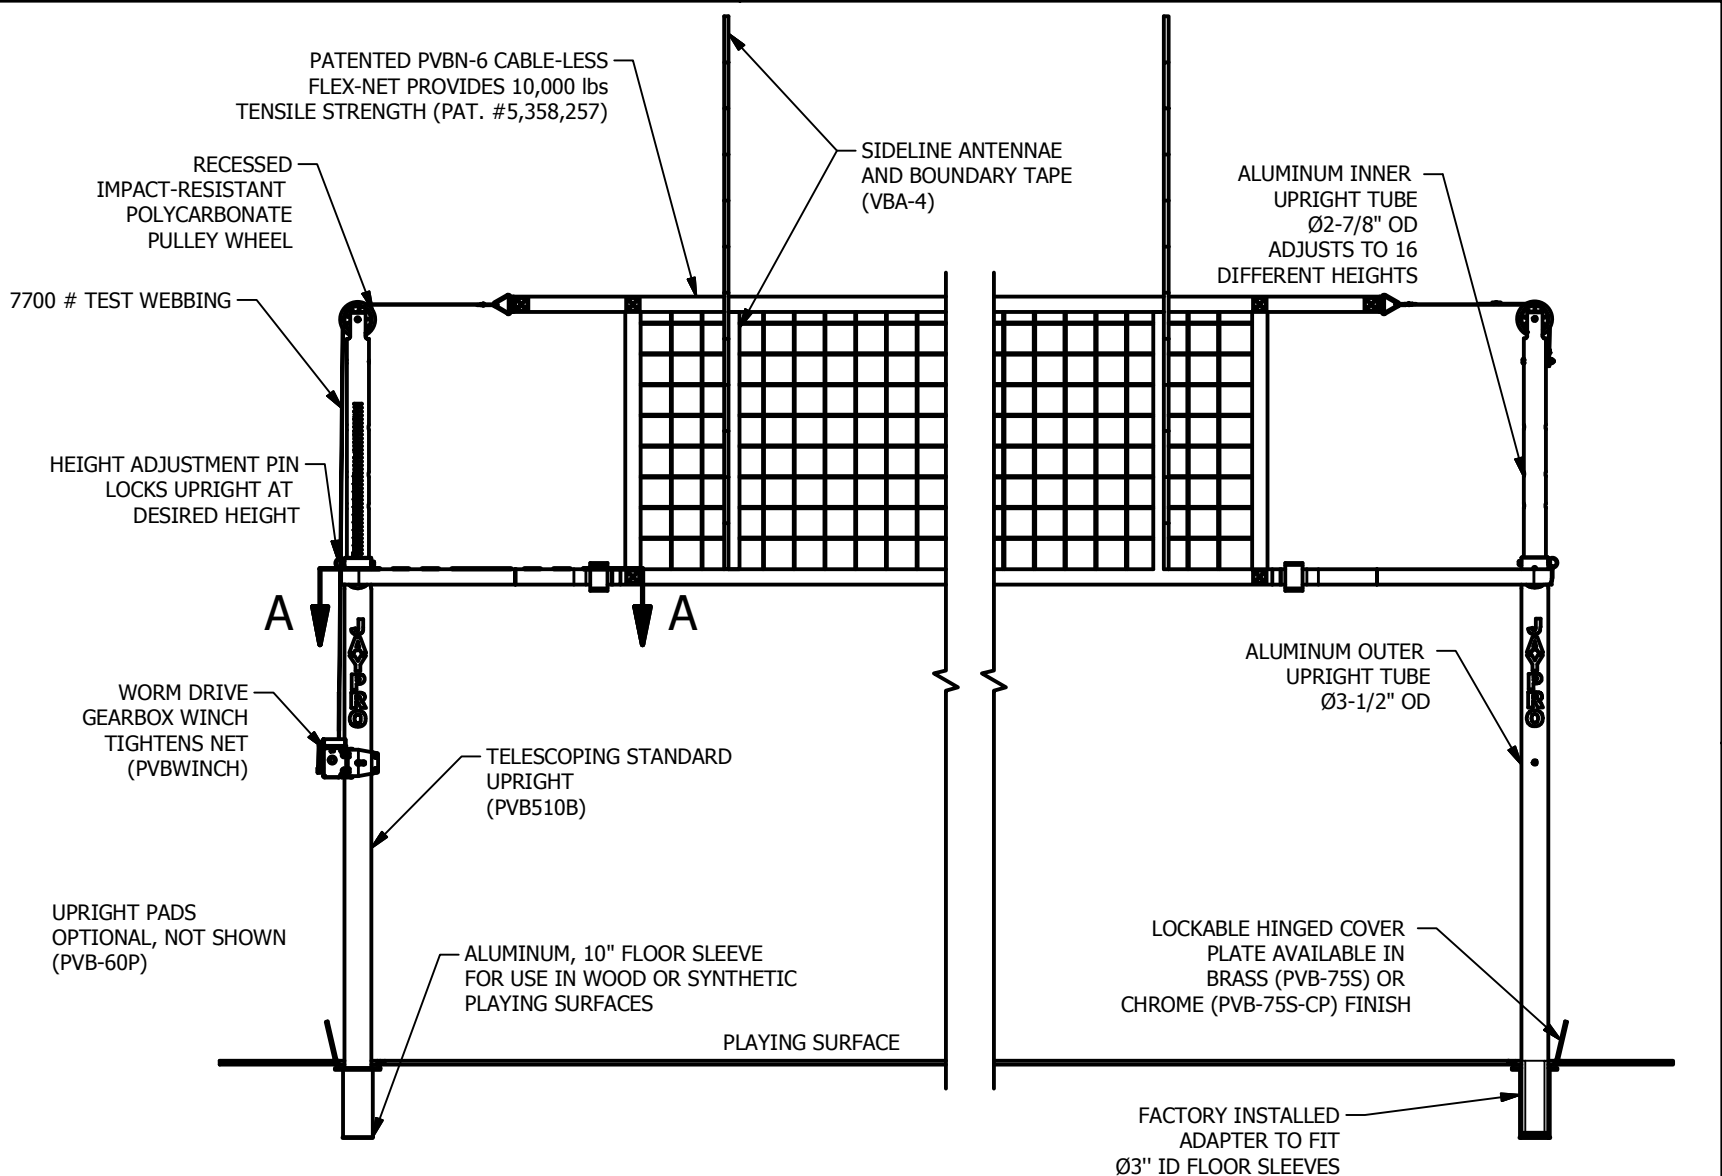

2" VELCRO STRAP TIGHTENS BOTTOM OF NET WHILE THE BUCKLE IS PADDED FOR PROTECTION



**SECTION A-A**

# **JAYPRO MODEL PVB-4500**

## **“Featherlite Collegiate Net System”** **DELUXE 3-1/2” DIAMETER ALUMINUM HEIGHT ADJUSTABLE** **VOLLEYBALL SYSTEM, FOR 3” SLEEVES**

System shall consist of two uprights and one winch and shall be supplied fully assembled. Uprights are intended to fit snugly into 3” ID x 10” deep rigid aluminum floor sleeves (Model #: PVB-70S/PVB-70S-CP).

Two piece telescoping uprights shall provide 16 individual net height settings from 6’6” to 8’2” by means of an attached positive locking stop pin. No field assembly required upon receipt. Lower section of upright shall be constructed of 3-1/2” OD x 0.300” wall aluminum tube with a durable black finish. Upper section shall be constructed of 2-7/8” OD x 0.203” wall aluminum tube with 4” diameter pulley to accommodate the net tensioning straps. Anchor strap shall be adjustable and winch strap shall be long enough to readily adapt to varying sleeve installation widths.

Lower upright section shall have a molded composite foot to protect the finished floor during transportation, storage, and installation of standards.

Tensioning winch shall have an internal worm gear construction with an effective 10:1 turn ratio to eliminate snap-back and shall be completely enclosed with a welded steel cover. The winch shall be furnished with folding handle. Winch will have 1-1/2” wide high tensile strength (7700#) nylon strap with sewn snap buckle for complete cable-less design. Winch is located on outside of post for added player safety.

Optional standard pads: PVB-60P.

Printed February 14, 2014. Subject to changes in design and manufacture.  
Copyright 2010, Jaypro Sports Inc – All Rights Reserved

## **PVB-4500**

T:\Aftermarket\Volleyball\PVB Series Volleyball Standards\PVB Series - Documentation\PVB Documentation - Specsheets\PVB-4500  
Specsheets\MT - REV-A PVB-4500 SPECSHEET Page 2.docx