



CLICK HERE TO VIEW
MARKETING VIDEO



products meet
or exceed applicable
ANSI/BIFMA standards



SPECS:

- Constructed with 3/4" solid plywood core
- Available with carpet in choice of 4 colors or 1/8" thick tempered hardboard
- 16-gauge, 1-13/16" high formed steel channel frame reinforced with 16-gauge steel angle welded to the inside of the channel
- 14-gauge steel tubing capped at the point of floor contact with high impact plastic glides
- Legs open and close using only one hand

- Stages and risers equipped with drop-in couplings that allow units of same or different heights to be joined together
- All ganging devices are permanently secured to each unit
- Exceeds 200 lbs. per square foot load bearing capacity
- Available in 36" and 48" widths and 96" length
- Comes in 4 heights; 8", 16", 24" and 32"
- Skirting available for all stages in 2 styles; shirred pleat and box pleat
- Optional Stage Pies for semi-circle arrangements
- 3 step heights available to connect to 16"H Stages and above
- Optional Guardrails recommended for safety. Guardrails are 14-gauge
- 10-year warranty



MODEL S4824C SHOWN




MODEL SPST48C SHOWN

SURFACE CAN BE
HARDBOARD
OR CARPETED

INCLUDES 36"W AND 48"W
STAGES, STAGE PIES,
& STAGE SETS


CARPET COLOR OPTIONS

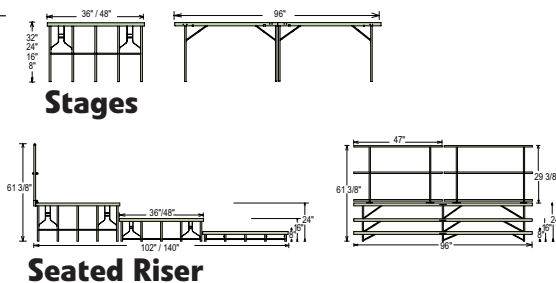

Box Pleat Skirting



Shirred Pleat Skirting



SKIRTING COLOR OPTIONS



USE WITH:

Model #GRS
Stage Guard
Rail




Model #SDL
Stage Dolly

BUILT IN LATCH
SECURES STAGES
TO DOLLY



HOLDS 6
STAGES

Steps
For Stages

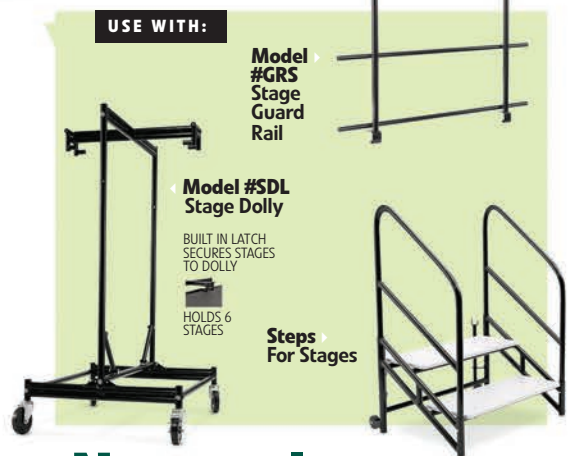

National Public Seating

