

## Important Information

**WARNING**

**CHOKING HAZARD:** Adult assembly required due to the presence of small parts and sharp edges.

- Keep instructions for future use.
- Do not use if damaged or broken.

Cleaning Instructions:

Wipe clean with a damp cloth and mild soap as needed. Dry thoroughly.

Maintenance:

**IMPORTANT:** Check all connecting bolts monthly to make sure they are tight!

**Tools Needed:**



**Assembly Instructions:**

Step 1: Using the Screwdriver, carefully slip the tip between the rubber of the tire and the hub cap. Then gently pry the hub cap up approximately an inch (2 ½ cm).

Step 2: Turn the wheel a half turn and repeat Step 1.  
The hub cap should come freely off.



Step 3: Repeat Steps 1 and 2 for the opposite rear wheel.




Step 4: Gently tap the end of the axle with the hammer to position the axle correctly.



Step 5: Place the washer that is supplied onto the axle, then place the wheel onto the axle in the order as shown.


Step 6: Stand the tricycle on its side and position the wheel that is attached with the end of its axle on top of the wooden block.

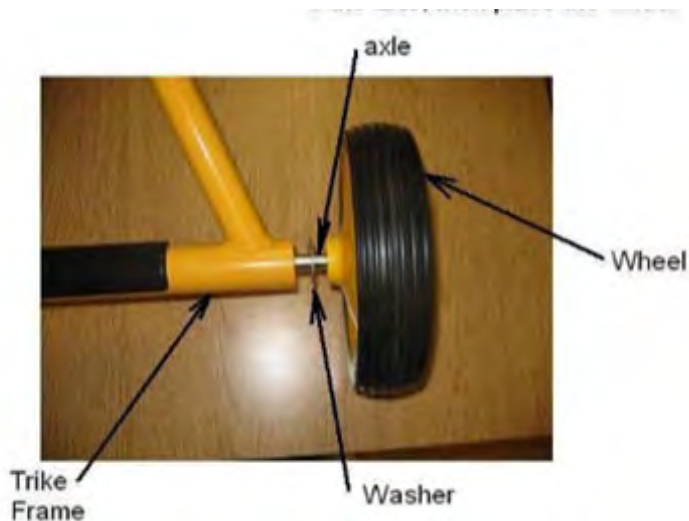


Step 7: The wheel that is not attached should be the top wheel. Place the washer that is supplied onto the end of the axle as shown.



Step 8: Place the Lock Washer on the end of the axle as shown with the teeth pointed up.

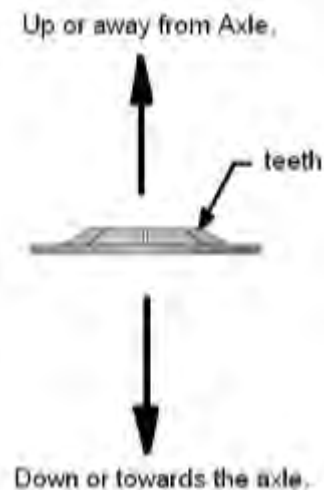

Step 9: Place a piece of pipe, or socket, with the dimension shown on top of the Lock Washer.

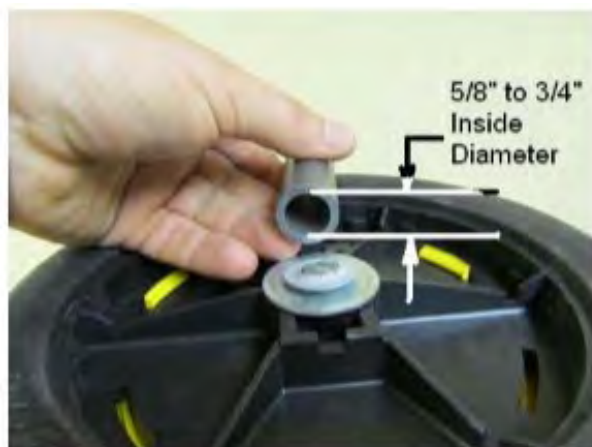


Step 10: Gently tap the end of the Pipe/Socket forcing the Lock Washer onto the end of the axle. DO NOT drive the Lock Washer too far onto the axle and check often to make sure that this is not happening. Refer to Step 11 for further description.





Step 11: A small gap must be present, and the wheel must spin freely.

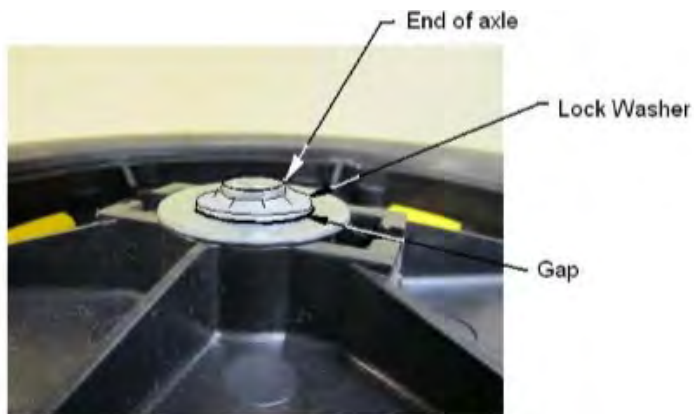

Step 13: Press the hub cap into place.



Step 12: Line up and insert the tabs on the hub caps with the open slots in the wheel.



Step 14: Repeat Step 12 and 13 to install the opposite hub cap.



**Cleaning & Maintenance:**

**Thank you for your purchase of our Angeles product. Periodic cleaning and maintenance will ensure that it will provide many years of service.**

**Cleaning:**

A soft cloth and a mixture of mild non-abrasive soap and water is usually enough to clean heavily soiled deposits from our products. Cleaners should be used as a last resort and be used only following the warnings and directions on the cleaner.

To disinfect, Add 1/4 cup of bleach to 1 gallon of cool water or for a smaller amount you can mix 1 tablespoon bleach to 1 quart cool water.

Keep the bleach solution you mix each day in a cool place out of direct sunlight and out of the reach of children.

PLEASE NOTE: A solution of bleach and water loses its strength very quickly and easily. It is weakened by organic material, evaporation, heat and sunlight. Therefore, bleach solution should be mixed fresh each day to make sure it is effective. Any leftover solution should be discarded at the end of the day. *NEVER mix bleach with anything but fresh tap water!*

**Maintenance:**

Tools that are provided with the product should be retained and used with maintaining your Angeles product.

Using common tools and/or supplied tools, check bolts and screws monthly to ensure the tightness.

Light oil in moderation can be used on moving parts to ensure proper movement and operation. Be sure to properly clean up any excessive oil.

**Questions, comments or concerns....**

Please contact our Customer Service department by email at [customerservice@childrensfactory.com](mailto:customerservice@childrensfactory.com)